


B O R D A D O

4.0 mm

1  1534

- + <| |> << Start Restart O Quit

Speed: 1534 stitches/sec

TRIM

Conjunto de puntadas y técnicas empleadas para la ornamentación de superficies (tejidos, pieles, papel...) mediante el uso de hilo y aguja

31.0 mm

1

16769

16769

16769

-

+

<|

|>

<<

Start


Restart

O

Quit

Paleolitico superior

9.0 mm

1  2451

- + <| |> << Start Restart O Quit

SIGLO XIX
MAQUINA BORDADORA

9.0 mm

1

✂



✂

4643

-

+

<|

|>

<<

Start

Restart

O

Quit

80S MAQUINA COMPUTERIZADA

13.0 mm

1

4457

IS

- + <| |> << Start Restart O Quit

MAQUINA DOMESTICA
+ INK STITCH

9.0 mm

1

⌘



⌘

4692

- + <| |> << Start Restart O Quit

BORDADO A MANO
BORDADO A MAQUINA
BORDADO DIGITAL

9.0 mm

1  8384

- + <| |> << Start Restart O Quit

BORDADO A MANO	BORDADO A MÁQUINA	BORDADO DIGITAL *
PROCESO MANUAL / ARTESANAL	PROCESO MECANICO / ARTESANAL MÁQUINA	PROCESO MECANICO / DIGITALIZADO MÁQUINA + SOFTWARE
MOVIMIENTO MANUAL	MOVIMIENTO NO AUTOMATIZADO, MÁQUINA DE MOVIMIENTO LIBRE	MOVIMIENTO AUTOMATIZADO
LENTO	ÁGIL	RÁPIDO
HASTA 1500MM O MÁS	TAMAÑO MÁXIMO DE BASTIDOR 25 CM APROX	TAMAÑO MÁXIMO DE BASTIDOR 170MMxMM
ENTRETELA NO NECESARIA SALVO EXCEPCIONES	NECESARIA ENTRETELA	NECESARIA ENTRETELA
MULTITUD DE PUNTADAS, TÉCNICAS Y MATERIALES.	PUNTADAS LIMITADAS	VARIEDAD DE PUNTADAS, PERO LIMITADAS
TODO TIPO DE DISEÑOS	DISEÑOS GENERALMENTE SIMPLES	CREACIÓN DE DISEÑOS DIGITALES, DISEÑOS CUSTOMIZABLES
BORDADOS ÚNICOS,SERIES LIMITADAS	BORDADOS REPRODUCIBLES, NO IDÉNTICOS	BORDADOS REPRODUCIBLES ILIMITADAMENTE, IDÉNTICOS

*Se refiere a bordado digital domestico y semiprofesional. Las máquinas bordadoras industriales tienen otras características

PROCESO DE BORDADO
DISEÑO Y EJECUCION

10.0 mm

1 6270

6270

- + <| |> << Start Restart O Quit



INK STITCH

5.0 mm

1

⌘



⌘

1599

- + <| |> << Start Restart O Quit

Speed: 1599 stitches/sec

TRIM


RELELENO

SATIN


TRAZO

TEXTO

5.0 mm


1  4144

- + <| > << Start Restart O Quit

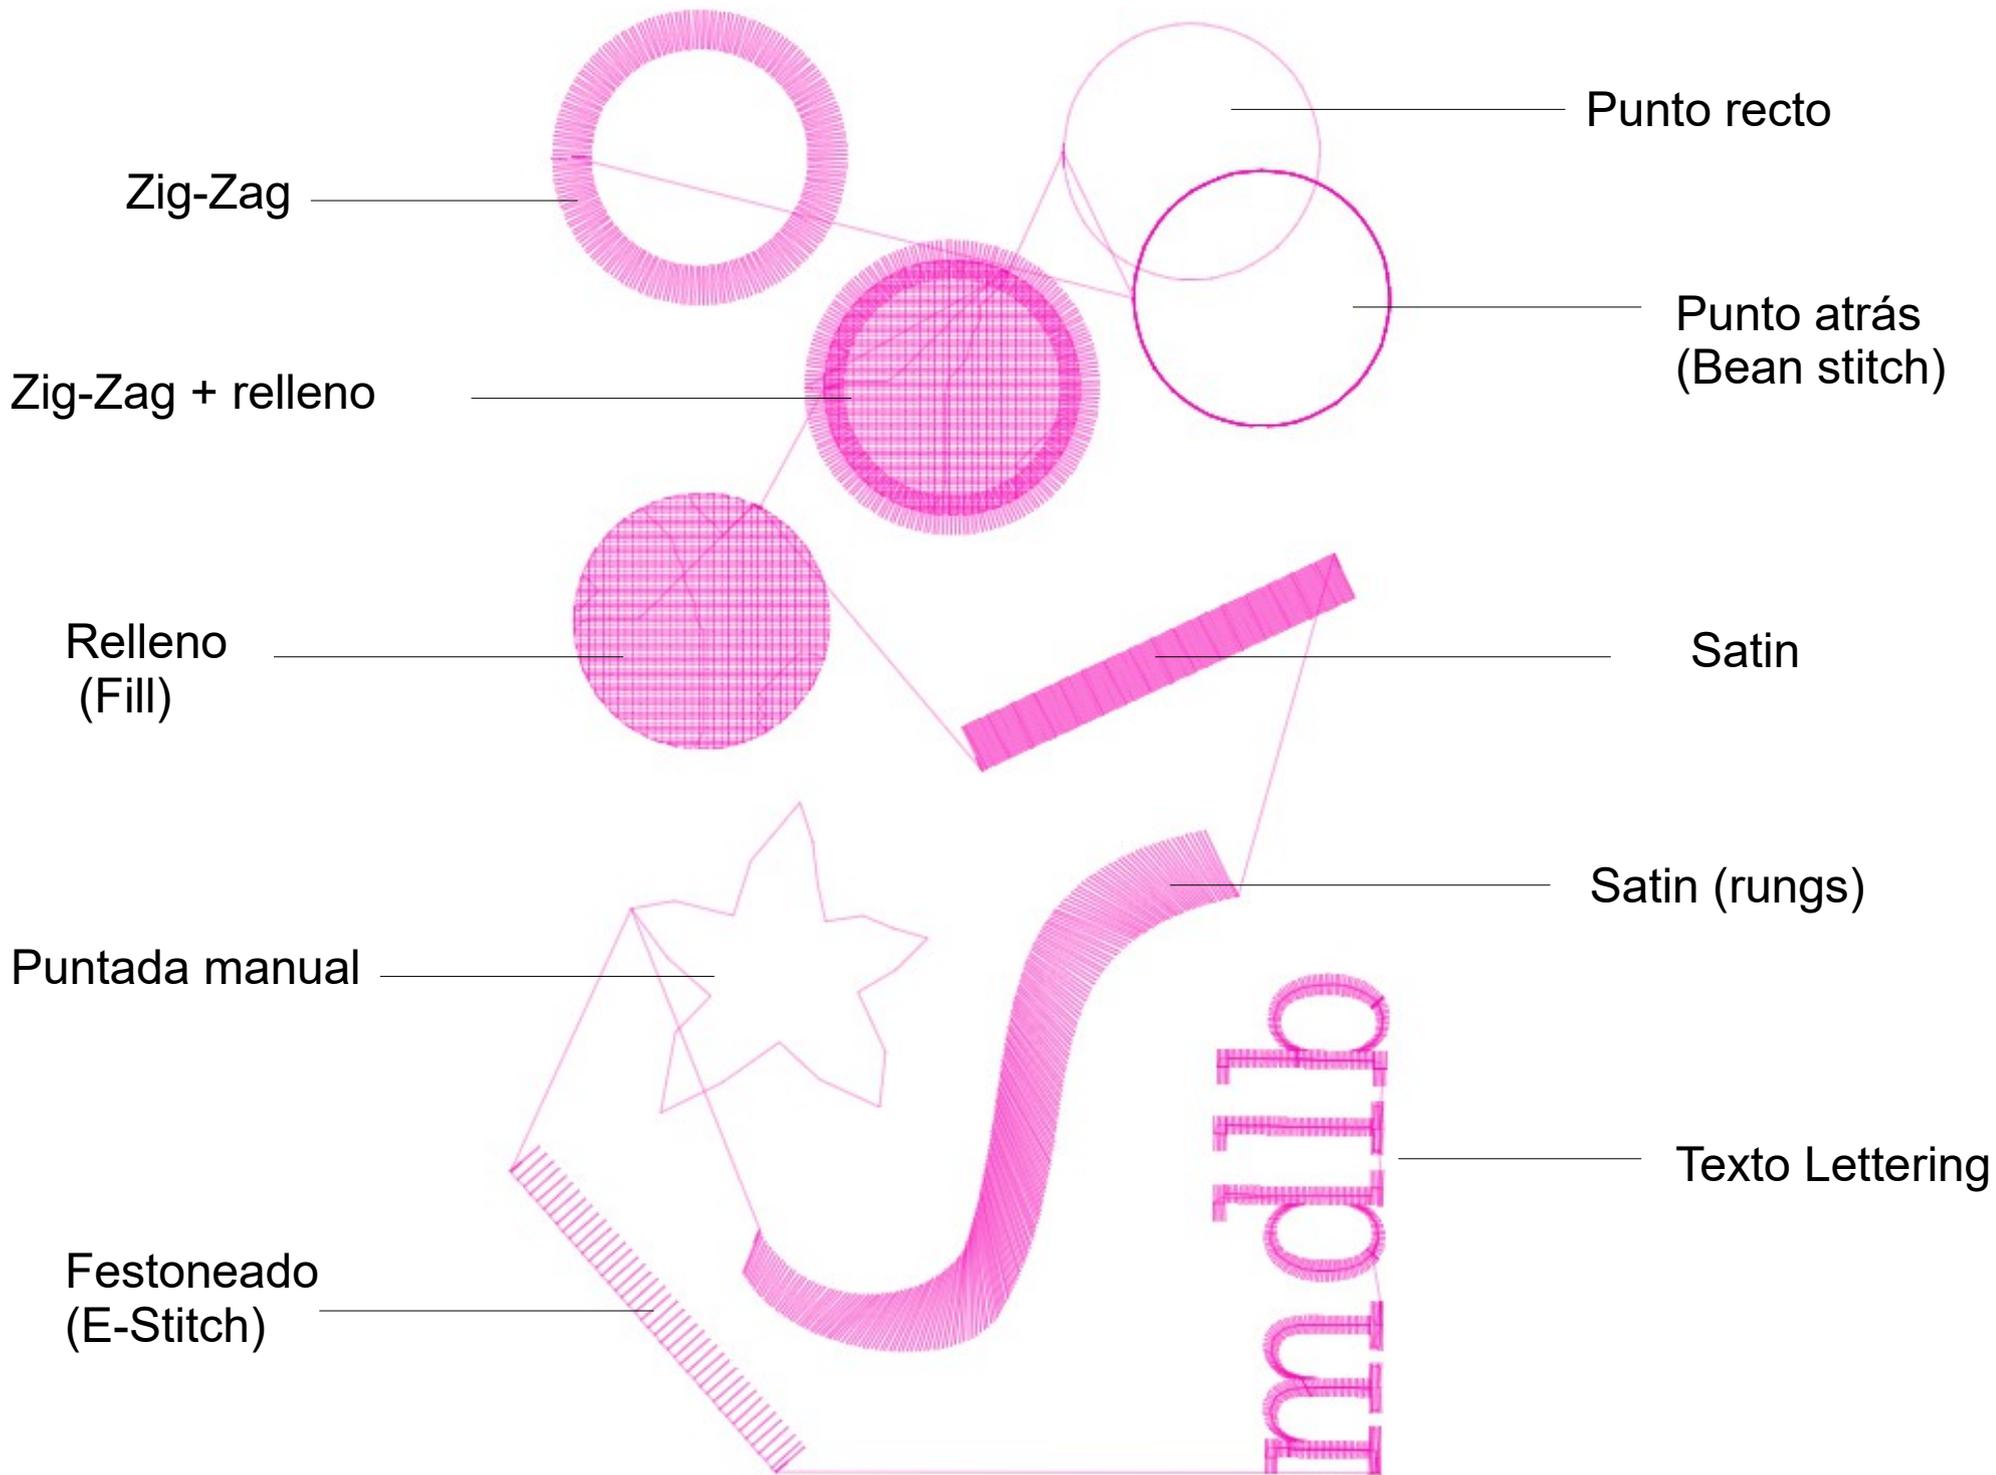

RELENO

4.0 mm

1  17 1474

- + <| |> << Start Restart O Quit

Embroidery Params

AutoFill AutoFill Underlay Fill

Inkscape objects

These settings will be applied to 1 object.

- Disabling this tab will disable the following 1 tabs.
- Enabling this tab will disable Fill and vice-versa.

Automatically routed fill stitching

Angle of lines of stitches deg

Expand mm

Maximum fill stitch length mm

Spacing between rows mm

Running stitch length (traversal between sections) mm

Skip last stitch in each row


Stagger rows this many times before repeating

Underpath

Ties

Presets

Preview

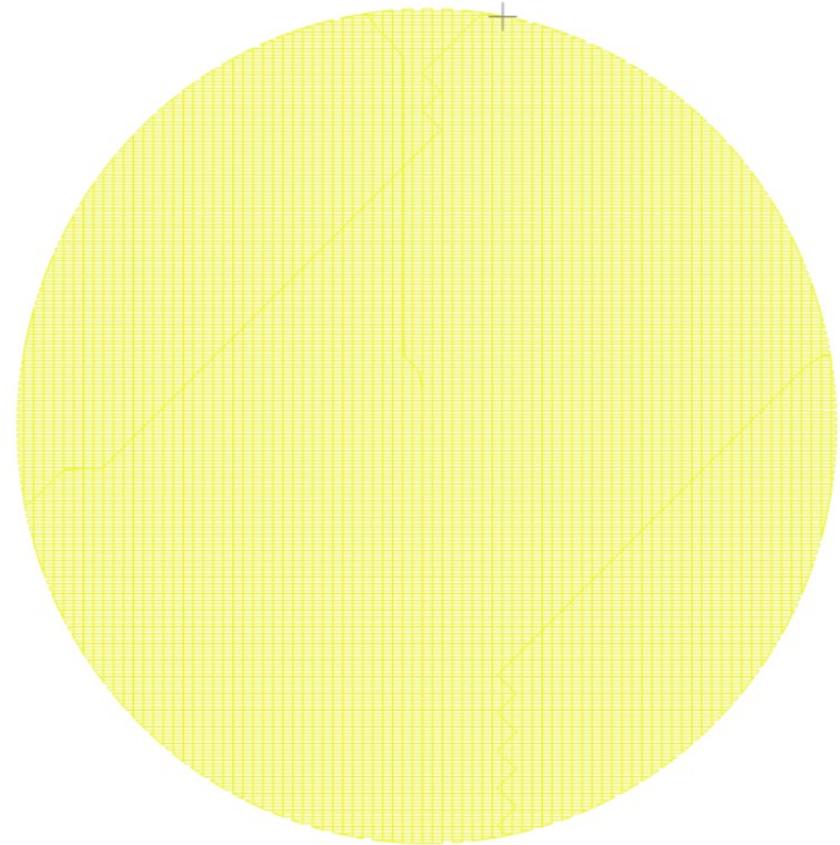


6.0 mm

1


Speed: 1239 stitches/sec

STITCH

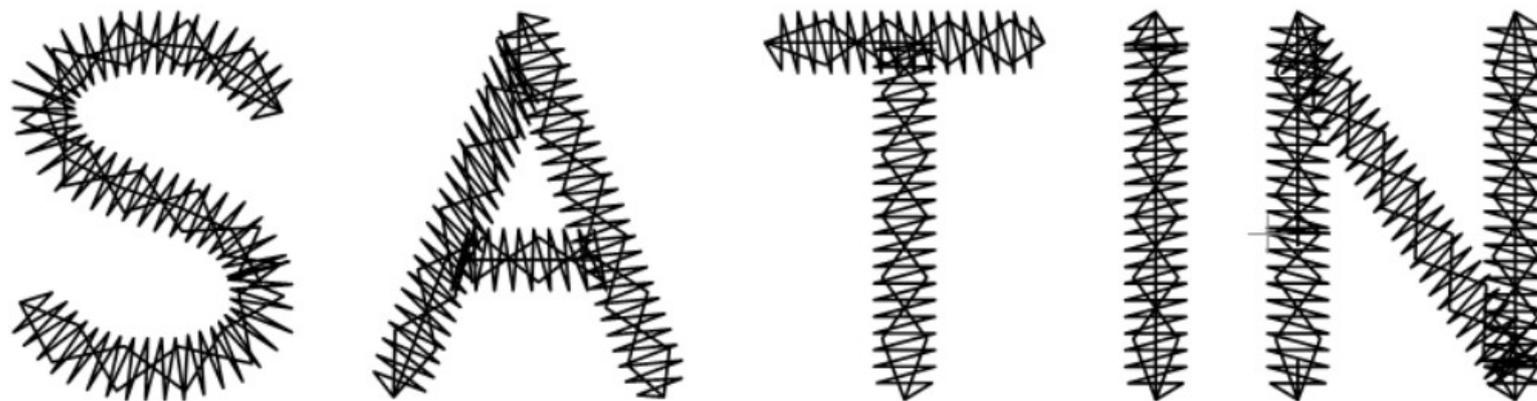

3.0 mm

1



4

841

- + <| |> << Start Restart O Quit

Documento nuevo 1 - Inkscape (No responde)

Archivo Edición Ver Capa Objeto Tráfico Texto Filtros Extensiones Ayuda

Modo Embroidery Params

Satin Column Center-Walk Underlay Contour Underlay Zig-zag Underlay Stroke

Inkscape objects

These settings will be applied to 1 object.

- Disabling this tab will disable the following tab.
- Enabling this tab will disable Stroke and vice-versa.

Custom satin column

"E" stitch

Pull compensation mm

Zig-zag spacing (peak-to-peak) mm

Ties

Presets

Load Add

Cancel Use La

Preview

9.0 mm

1 1412

Start Restart O Quit

Speed: 282 stitches/sec


Embroidery Params
Satin Column Center-Walk Underlay Contour Underlay Zig-zag Underlay Stroke

Inkscape objects
These settings will be applied to 1 object.
• Disabling this tab will disable the following tab.
• Enabling this tab will disable Stroke and vice-versa.

- Custom satin column
- "E" stitch
- Pull compensation mm
- Zig-zag spacing (peak-to-peak) mm
- Ties

Presets

Preview

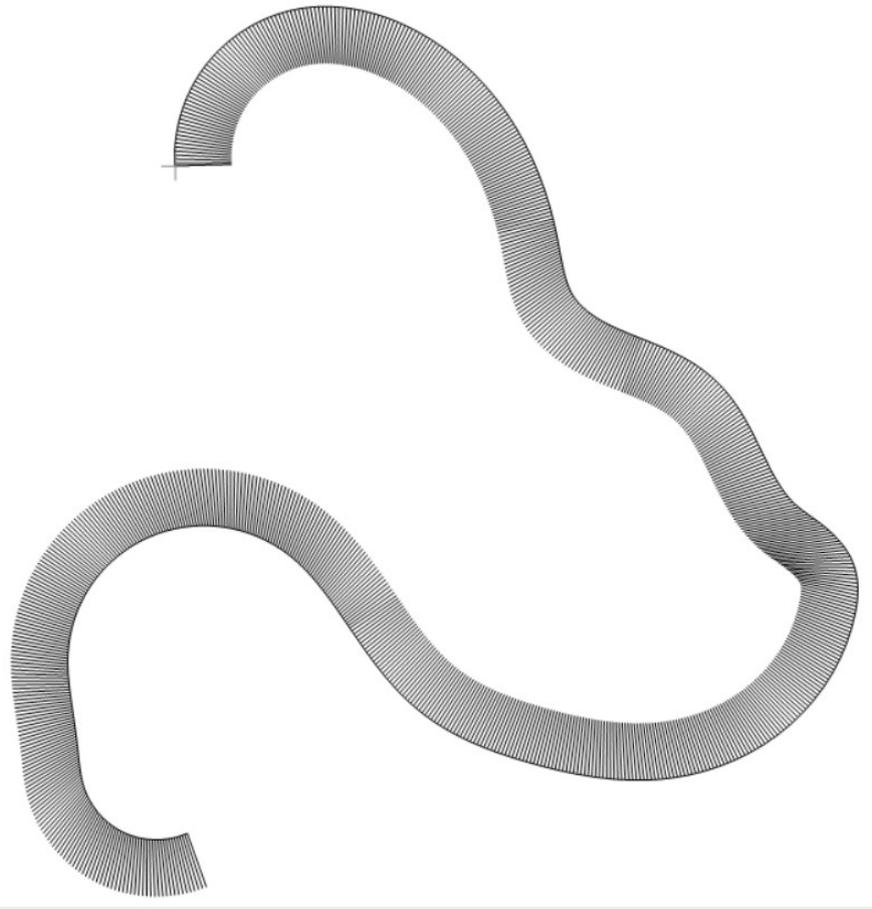

1 11



3.0 mm

1 4 948

- + <| |> << Start Restart O Quit

Speed: 948 stitches/sec

TRIM

Embroidery Params

Stroke **Satin Column** Center-Walk Underlay Contour Underlay Zig-zag Underlay

Inkscape objects

These settings will be applied to 1 object.
• Enabling this tab will disable Satin Column and vice-versa.

Satin stitch along paths

Manual stitch placement

Repeats

Bean stitch number of repeats

Running stitch length mm

Zig-zag spacing (peak-to-peak) mm

Ties

Presets

Load Add

Cancel Use L

Preview

9.0 mm

1 1109 1109

Speed: 221 stitches/sec STITCH

Start Restart O Quit

Embroidery Params

Inkscape objects
These settings will be applied to 1 object.

- Satin stitch along paths
- Manual stitch placement
- Repeats: 1
- Bean stitch number of repeats: 0
- Running stitch length: 2 mm
- Zig-zag spacing (peak-to-peak): 0.4 mm
- Ties

Presets

Cancel Use Last

Preview

9.0 mm

1 119 119

Speed: 23 stitches/sec STITCH

- + <| |> << Start Restart O Quit

Embroidery Params

Stroke

Inkscape objects
These settings will be applied to 1 object.

- Satin stitch along paths
- Manual stitch placement
- Repeats:
- Bean stitch number of repeats:
- Running stitch length: mm
- Zig-zag spacing (peak-to-peak): mm
- Ties:

Presets

Preview

9.0 mm

1

Speed: 207 stitches/sec STITCH

Embroidery Params

Stroke

Inkscape objects

These settings will be applied to 1 object.

- Satin stitch along paths
- Manual stitch placement
- Repeats: 1
- Bean stitch number of repeats: 0
- Running stitch length: 1.5 mm
- Zig-zag spacing (peak-to-peak): 0.4 mm
- Ties:

Presets

Load Add Over

Cancel Use Last Set

Preview


8.0 mm

1 13 13

- + <| |> << Start Restart O Quit

LETTERING

5.0 mm

1  31  1814

- + <| |> << Start Restart O Quit

Speed: 1814 stitches/sec

TRIM